

Ankor DS-30

Cerniera incassata ad alta portata
Heavy duty recessed hinge



Ankor DS-30

Cerniera a scomparsa ad alta portata per ante a battente.
Sono disponibili squadrette in zama per profili in alluminio e un
tappo copriviti.


Materiali: Zama, Acciaio, Nylon.

Finiture: Nichelata, Nichelata Nera.


Heavy duty recessed hinge for swing doors. Zama corner
brackets for aluminium profiles and a cap to cover the screws
are available.

Materials: Zama, Steel, Nylon.


Finishings: Nickel Plated, Black Nickel Plated.




Regolazione frontale, verticale e laterale dell'anta
Front, vertical and lateral adjustments




Peso massimo anta 30 kg
Max door's weight 30 kg



Spessore anta 20-40 mm
Door's thickness 20-40 mm




Chiusura ammortizzata
Soft closing




Angolo d'apertura 100°
Door's opening angle 100°

Spazio occorrente per l'apertura dell'anta
Required space for door's opening

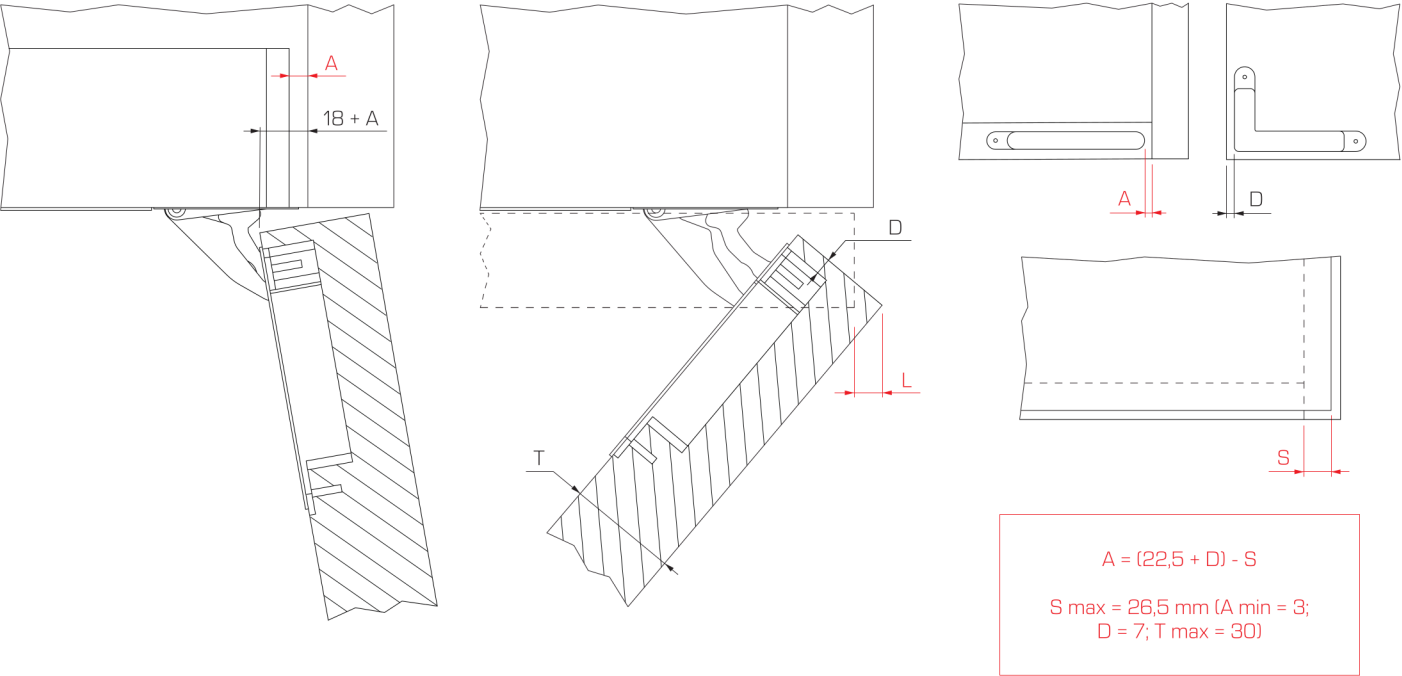


	T = 20	T = 22	T = 24	T = 26	T = 28	T = 30	T = 32	T = 34	T = 36	T = 38	T = 40
L (D = 3)	-	-	-	-	-	0,5	1	1,8	2,9	4,3	5,8
L (D = 4)	-	-	-	-	0,2	0,5	1	1,8	2,8	4	5,5
L (D = 5)	-	-	-	-	0,2	0,5	1	1,6	2,6	3,8	5,1
L (D = 6)	-	-	-	-	0,2	0,5	1	1,6	2,5	3,6	4,8
L (D = 7)	-	-	-	-	0,2	0,5	1	1,6	2,1	3,3	4,6


Regolazioni
Adjustments

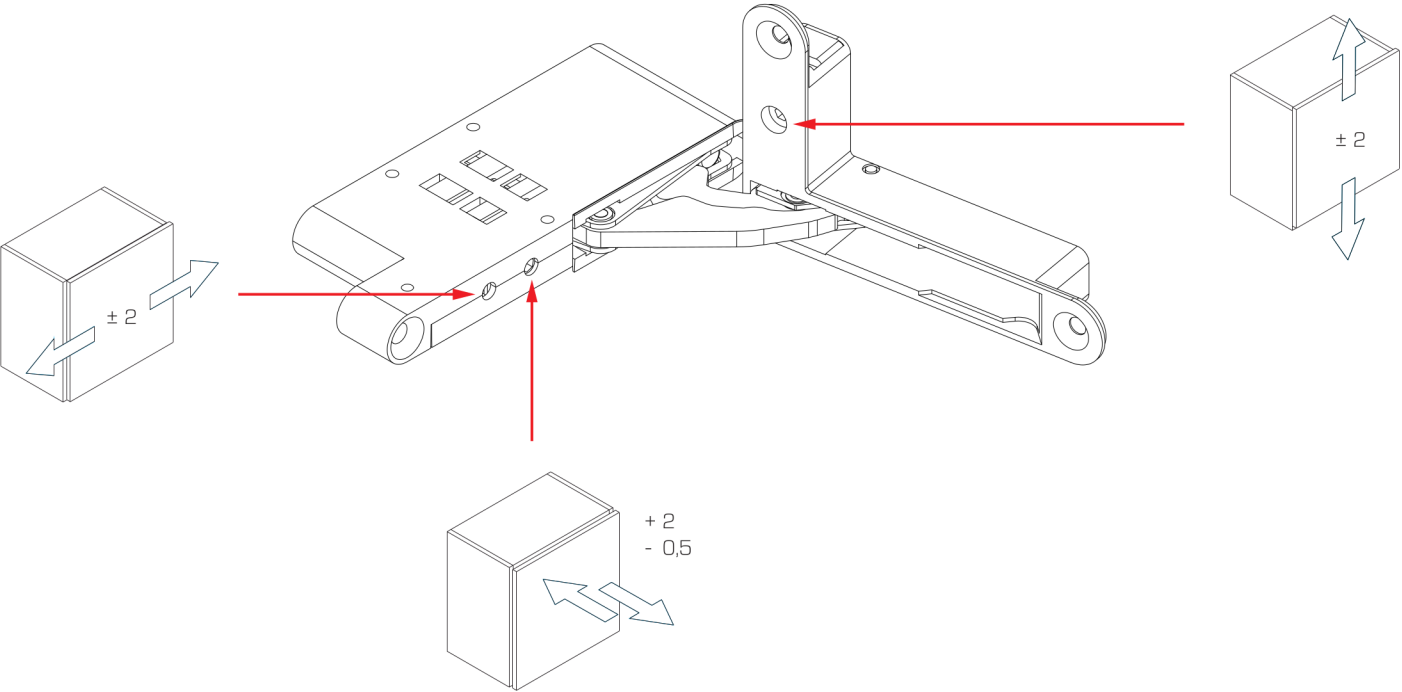

Foratura anta
Door's drilling

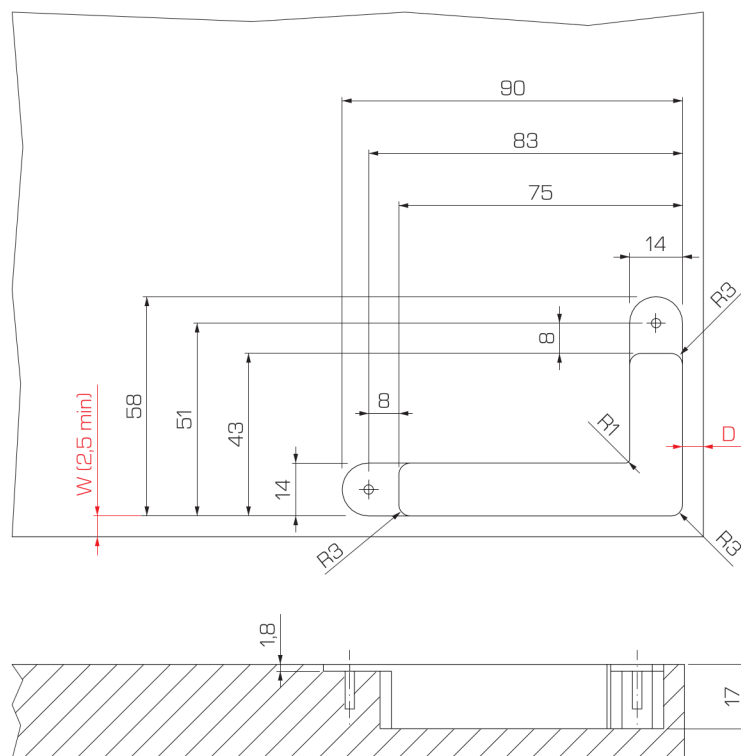

Foratura base e cappello
Top & bottom panel drilling

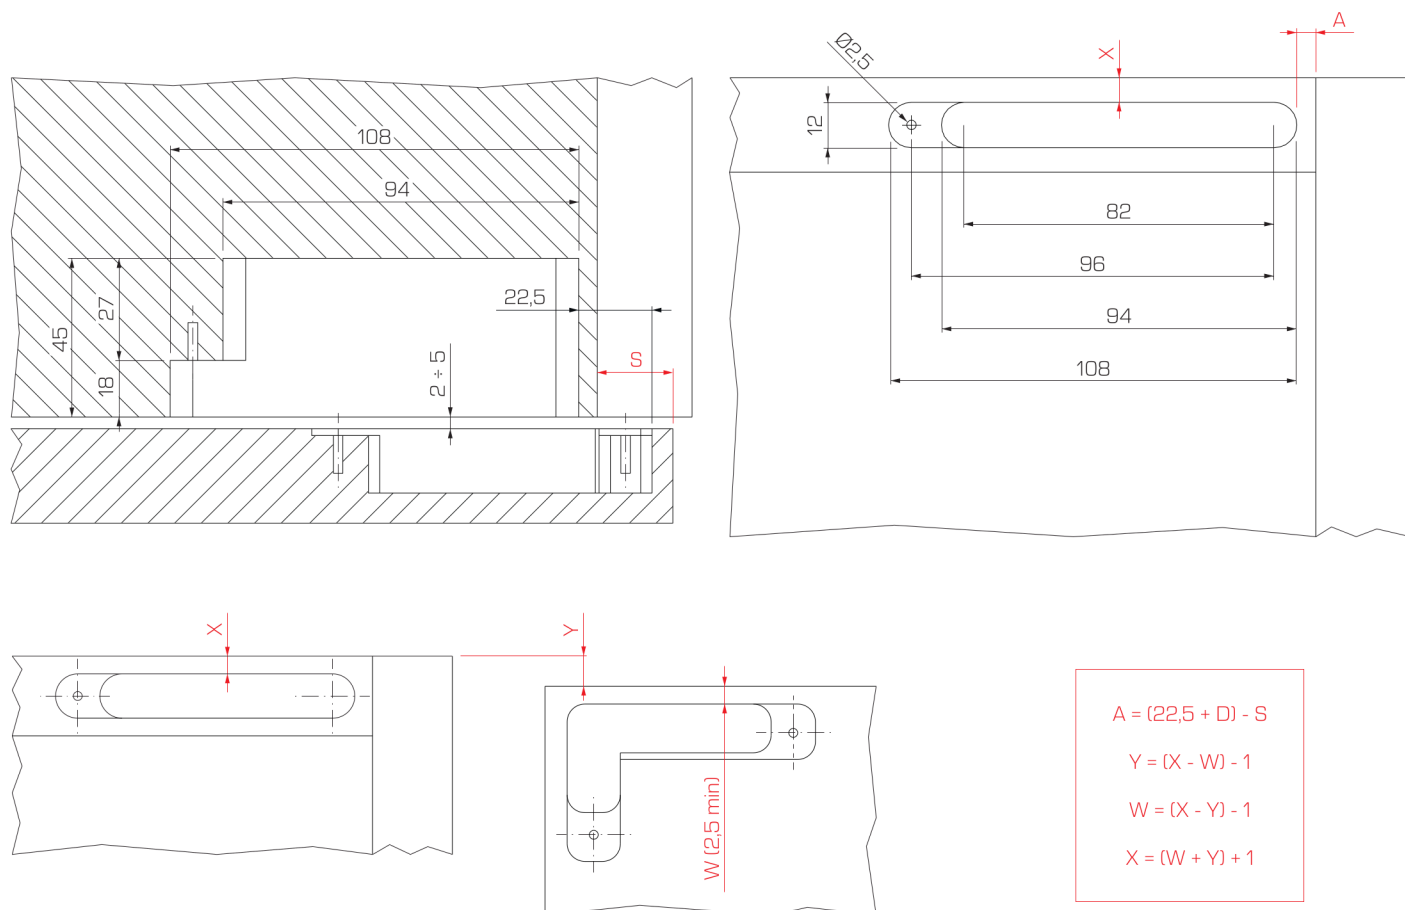



ATTENZIONE - WARNING

Il supporto per anta in alluminio è un accessorio opzionale

The support for aluminum door's connection is an optional accessory

